

# elcometer® 3508 & 3560 4 Gap Applicator with Reservoir


Can be used in accordance with:

ASTM D 3022

ASTM D 823

FTMS 141a M2161

FTMS 141 A 2162

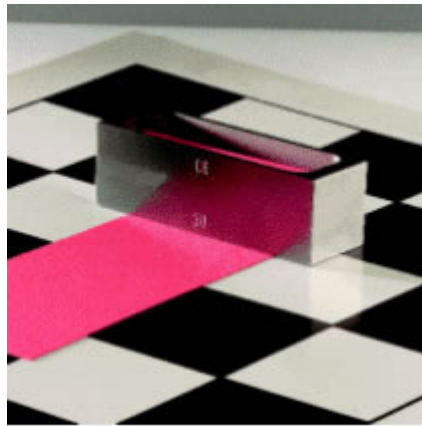

A simple gauge with a single reservoir allowing the user to generate 4 different thicknesses of coating.

These stainless steel applicators are made with 4 straight spreading edges of fixed film gaps.

The Elcometer 3508 4 Gap Applicator with 2 reservoirs has been designed specifically for the generation of test samples for use with the **Elcometer 1720 Abrasion, Scrubbing and Washability Tester**.

## Technical Specification

Model	Number of Gaps	Film Gaps µm	Film Width mm	Part Number
Elcometer 3560/1	4	30, 60, 90, 120	60	K0003560M201
Elcometer 3560/2	4	50, 100, 150, 200	60	K0003560M202
Elcometer 3508	4	100, 150, 200, 250	2 x 50	K0003508M001