


elcometer **3520 Baker Film Applicator**

Can be used in accordance with:

ASTM D 3022
ASTM D 823
FTMS 141a M2161
FTMS 141a 4122.1
FTMS 141a 2162

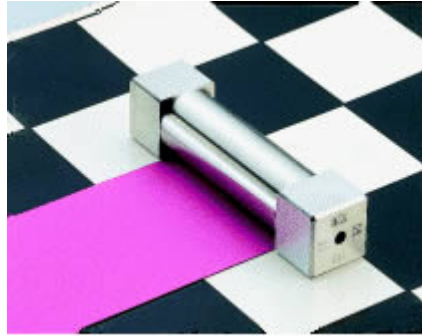

Made of hardened stainless steel with a cylindrical applicator body, these gauges apply a coating of specified thickness and film width on flat, relatively firm substrates.

The Elcometer 3520 Baker Film Applicator can also be used with the Elcometer 4330 and Elcometer 4340 Motorised Film Applicators.

Each Elcometer 3520 Baker Film Applicator has four fixed gap sizes and is available in a range of film widths.

Technical Specifications

Model	Number of Gaps	Film Gaps	Film Width	Part Number
		µm	mm	
Elcometer 3520/1	4	30 , 60 , 90, 120	25	K0003520M001
Elcometer 3520/2	4	30 , 60 , 90, 120	50	K0003520M002
Elcometer 3520/3	4	30 , 60 , 90, 120	60	K0003520M003
Elcometer 3520/4	4	30 , 60 , 90, 120	75	K0003520M004
Elcometer 3520/5	4	30 , 60 , 90, 120	100	K0003520M005
Elcometer 3520/6	4	30 , 60 , 90, 120	125	K0003520M006
Elcometer 3520/7	4	30 , 60 , 90, 120	150	K0003520M007
Elcometer 3520/11	4	30 , 60 , 90, 120	175	K0003520M011
Elcometer 3520/9	4	30 , 60 , 90, 120	200	K0003520M009
Elcometer 3520/8	4	30 , 60 , 90, 120	250	K0003520M008

Other gaps and film widths are available upon request

