

Elcometer 480 Single, Dual & Triple Angle Glossmeters

Can be used in accordance with:

AS/NZS 1580.602.2, ASTM C584, ASTM C523, ASTM D523, ASTM D1455, ASTM D2457, ASTM D4039, ASTM E430, ASTM E2387, BS 3900 D5, DIN 67530, ECCA T2, EN 12373-11, EN 13523-2, ISO 7668, ISO 2813, ISO 13803, JIS K 5600-4-7, JIS Z 8741, TAPPI T 653



The Elcometer 480 Glossmeter range are easy to use glossmeters which combine high accuracy, repeatability and reproducibility with functionality making them the most advanced gloss meters on the market today.

Combining easy to use, multi-lingual menu structures with exceptional repeatability, reproducibility & accuracy, the Elcometer 480 gloss meter provides users with best in class hand held gloss measurement.

Using state of the art design and manufacturing techniques, the Elcometer 480 glossmeter provides world leading features and functionality - reliably measuring & recording Gloss, % Reflectance & Haze on any material, including paint, plastic, ceramic or metal.

The Elcometer 480 gloss meter rapid LED technology accurately measures up to 3 gloss angles at the same time at a rate of 10 readings per second. Gloss measurements can be instantly transferred from the glossmeter to PC, iPhone, Android™ or other mobile devices via USB or Bluetooth®.

Features

- Small, robust & ergonomic
- 3 - 10 readings per second
- Repeatable, reproducible & accurate
- Multiple angles; 20°, 60°, 85°
- 40,000 reading memory in up to 2,500 batches
- Date and time stamped readings
- USB & Bluetooth® data output
- PC, iPhone or Android™ compatible
- Automatic gauge & tile diagnostics
- Auto calibration tile recognition via RFID*
- 40 user definable limit standards
- Standard, auto repeat and scan modes
- Differential mode with pass/fail
- Display readings, statistics, graphs & batch review



The Model Range

The Elcometer 480 Glossmeter is available as either a simple entry level 60° glossmeter or state of the art Single, Dual or Triple angle gloss meter variants.

The Elcometer 480 Glossmeter is available with (Model T) or without (Model B) memory.

The Elcometer 480 Model B gloss meter is a 60° unit, Model T gloss meters are available as single, dual or triple angle variants with %Reflectance and Haze.



Accuracy & Repeatability

Advanced electronics and a superior optical design combine highly accurate, repeatable and reproducible measurements with industry leading inter-instrument agreement - across the Elcometer 480 Glossmeter's entire 0-2,000GU range.

Range	0-10GU	10-100GU	100-2000GU
Repeatability	±0.1GU	±0.2GU	±0.2%
Reproducibility	±0.2GU	±0.5GU	±0.5%

Calibration and Diagnostics

Every Elcometer 480 Gloss Meter Gloss Tile is fitted with an RFID (radio frequency identification) tag which allows automatic identification of the tile's serial number and calibration data when the tile is attached to the base of the glossmeter.

Additional calibration tiles are available from the range of Elcometer 480 glossmeter accessories.

Measurement Speed

The Elcometer 480 Glossmeter's rapid LED technology accurately & repeatably measures up to 3 angles at the same time.

Standard Mode	1+ reading per second	70+ readings per minute	< 0.3 seconds per angle
Auto Repeat Mode	3 readings per second	180 readings per minute	~ 0.1 seconds per angle
Scan Mode	10 readings per second	600 readings per minute	~ 0.03 seconds per angle

Display Modes

Fully customisable, scratch and solvent resistant colour LCD allows the user to display


- Gloss, % Reflectance or Haze measurements
- Statistics
- Readings and Differential with pass/fail
- Trend Graph
- Analogue Scan Bar




Triple angle readings




Gloss, Haze & %Reflectance

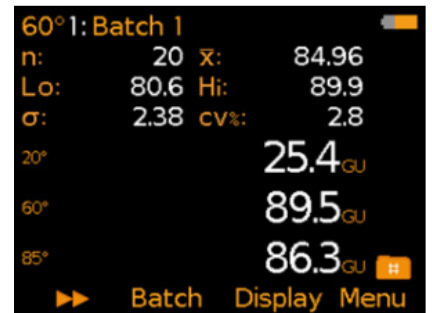


Readings & user selectable statistics

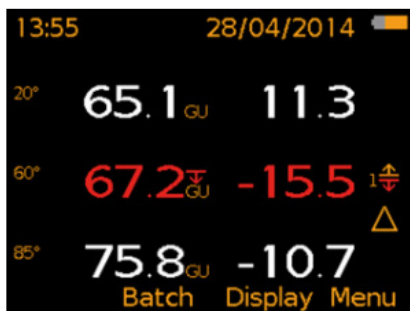

Readings & differential with pass / fail

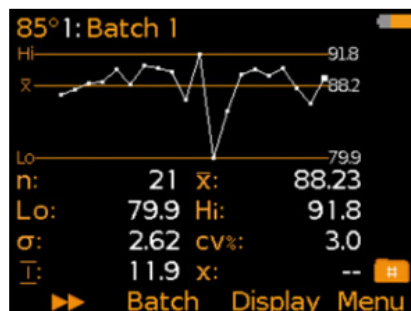

Run chart & statistics

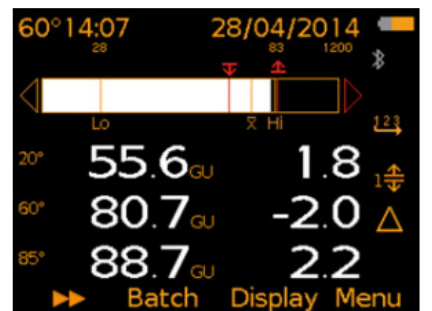

Readings & differential with analogue scan bar

Standard, Auto Repeat & Scan Modes

No two inspections are the same. It is for this reason that the Elcometer 480 Glossmeter is equipped with three gloss measurement modes:

Standard Mode: Press the measure button to take an individual spot gloss measurement.

Auto Repeat Mode: When the glossmeter is slid over the surface a measurement of all three angles is automatically taken at a user definable rate between 10 - 180 readings per minute. When enabled all the individual readings are stored into memory.

Scan Mode: As the glossmeter slides over the entire surface area, the gauge measures all three gloss angles at a continuous rate of 10 readings per second. When stopped, the glossmeter displays and stores the average, highest and lowest gloss values - ideal for checking a sample's overall uniformity.



Standard Mode



Auto Repeat Mode



Scan Mode

Memory and Batching

Store 40,000 date and timed stamped readings in up to 2,500 user definable alphanumeric batches.

Readings can be transferred to PC, iPhone, Android™ or other mobile devices via USB or Bluetooth® for instant reporting using ElcoMaster® Software.

Limit Standards and Differential Mode with Pass/Fail

When visual appearance is critical Master Standards are created. These are generated and approved by the customer and then used by manufacturers as part of their quality control inspection regime. As these Master Standards have been visually approved, they often do not have numerical gloss values assigned.

In order to avoid subjectivity between inspectors, the Elcometer 480 Glossmeter can automatically generate and store the nominal (target), highest & lowest acceptable gloss values (Limits) from the Master Standard.

Up to 40 Limits for each customer's Master Standards can be stored within, and recalled from, the gauge's 'Limit Standards' memory.

When Limit Standards are used in combination with the gauge's Differential Mode, the Elcometer 480 Gloss Meter displays the measurement value together with the difference from the nominal (target) value.

Readings outside the Limit Standards are displayed in red, providing quick Pass/Fail analysis.

Due to the Elcometer 480 Glossmeters industry leading inter-instrument agreement, once a Master Standard Limit has been created, the gauge can transfer these values to other Elcometer 480 glossmeters, via the ElcoMaster® Software's Library of Limit Standards, at any time.

Information from multiple glossmeters can be combined into a single inspection report within ElcoMaster® Software, ideal for multiple production and assembly lines.



Create instant reports with ElcoMaster®

What you do with the collected data is just as important as taking the readings themselves.

- Data transferred to ElcoMaster® includes
- 20° 60° & 85° Gloss Units (GU)
- Haze Unit (HU)
- % Reflectance (%)
- Date & time for each reading
- Limit Standard values
- Batch information & statistics
- Calibration information including date/time, serial number & tile values



Technical Specification

Product Features	Model B	Model T
Measurement geometries	60°	60°, 20/60° or 20/60/85°*
Measurement units	GU	GU, HU† & %
Fast, accurate reading rate	■	■
Repeatable & reproducible measurements	■	■
Easy to use menu structure; in 30+ languages	■	■
Tough, impact, waterproof & dust resistant	■	■
Scratch & solvent resistant colour display; 2.4" (6cm) TFT	■	■
Rotating display: auto, 0°, 180°	■	■
Ambient light sensor; with adjustable auto brightness	■	■
Data output		
USB live readings	■	■
USB batch download		■
Bluetooth®: to PC, iOS or Android™ mobile devices		■
USB & battery powered	■	■
Calibration Certificate	■	■
Manual gauge calibration	■	■
Auto gauge calibration; via RFID tagging of integrated calibration tile#		■
On screen statistics - user selectable		
Number of readings, Mean (average), Standard deviation,	■	■
Highest reading, Lowest reading, Range		■
Coefficient of variation,		■
Nominal value, High Limit value, Low Limit value		■
Number above high limit, Number below low limit		■
Measurement modes		
Standard Mode	■	■
Auto Repeat Mode; programmable 10-180 readings per minute		■
Scan Mode; 10 readings per second		■
Differential Mode with Pass/ Fail mode;		■
Limit Standards; up to 40 programmable standards		■
Gauge & batch specific standard limits		■
Gauge memory 40,000 readings in up to 2,500 batches		■
Alpha-numeric batch names		■
Fixed batch size mode		■
Date and time stamp		■
Gauge auto diagnostics	■	■
Display modes; user selectable		
Readings; gloss, % reflectance†, haze†	■	■
Selected statistics	■	■
Live trend graph; last 20 readings		■

Scan bar		■
Readings & differential (with pass/fail)		■
Delete last reading	■	■
2 year extended warranty	■	■

Model Options

Part Number	Description	Certificate
J480B-6	Elcometer 480 Model B 60° Glossmeter	●
J480T-6	Elcometer 480 Model T 60° Glossmeter	●
J480T-26	Elcometer 480 Model T 20/60° Glossmeter	●
J480T-268	Elcometer 480 Model T 20/60/85° Glossmeter	●

Technical Specification

Display information	6cm QVGA colour TFT display, 320 x 240 pixels
Power	USB (via PC) or 2 x AA batteries (~50,000 readings)
Measurement Dimensions	20°: 10 x 10mm; 60°: 8 x 16mm; 85°: 4 x 55mm
Measurement Range	20°: 0 - 2,000GU; 60°: 0 - 1,000GU; 85°: 0 - 160GU
Repeatability	± 0.1GU (0 - 10GU); ±0.2GU (10 - 100GU); ±0.2%: 100 - 2000GU
Reproducibility	± 0.2GU (0 - 10GU); ±0.5GU (10 - 100GU); ±0.5% 100 - 2000GU Gloss: 0.1 GU (0 - 100GU); 1 GU (>100GU)
Resolution	% Reflectance: 0.01% (0 - 10%); 0.1% (10 - 100%) Haze: 0.1 HU (0 - 100HU); 1 HU (>100HU)
Operating Temperature	-10°C to 50°C; Relative Humidity: 0 - 85%RH
Dimensions (H x W x D)	68 x 155 x 50mm
Weight	534g [including batteries]

* Dependant on model

Radio Frequency Identification; European Patent Number: 2906904

† Haze on Dual and Triple models only

▪ Certificate supplied as standard

Packing List

Elcometer 480 Glossmeter
Integrated calibration tile
Calibration certificates for gauge & calibration tile
2 x AA batteries
Wrist strap
Operating instructions
Plastic carry case
ElcoMaster software (Model T) and USB cable (Model T)

Accessories

Part Number	Description		Certificate
T48024798-LC	Low Gloss Calibration Tile	Nominal Value: 22GU at 60°	●
T48024798-MDC	Mid Gloss Calibration Tile	Nominal Value: 55GU at 60°	●
T48024798-HC	High Gloss Calibration Tile*	Nominal Value: 97GU at 60°	●
T48024798-MRC	Mirror Gloss Calibration Tile	Nominal Value: 1900GU at 20°	●
T48024798-SH	Soft Material Specimen Holder, complete with 3 sample trays		
T48025004	Soft Material Sample Trays (x3)		
T99923535	Gloss Tile Cleaning Cloth		
T99925002	USB Cable		



Each calibration tile is supplied within its own base unit to ensure measurement accuracy and repeatability



The soft material specimen holder is supplied with 3 sample trays - ideal for testing soft, powder or viscous materials

Appearance

Visual appearance can determine a person's perception of a product. Perception is subjective. A key measurement parameter used to define and quantify a product's overall visual quality is gloss.

Gloss is measured by directing a constant intensity light beam, at a fixed angle, on to the test surface and then monitoring the amount of reflected light from the same angle. This specular reflectance is measured using a glossmeter.

Different surfaces require different reflective angles.


High Gloss

Surfaces with a brilliant or highly polished finish reflect images clearly. This distinct reflection is caused by the incident light reflecting on the surface in a specular direction.

Semi & Matt Gloss

Semi and matt surfaces reflect images less distinctly and with reduced intensity.

On semi or matt surfaces light not only reflects in a specular direction but also is scattered causing the reflected image to appear diffused.

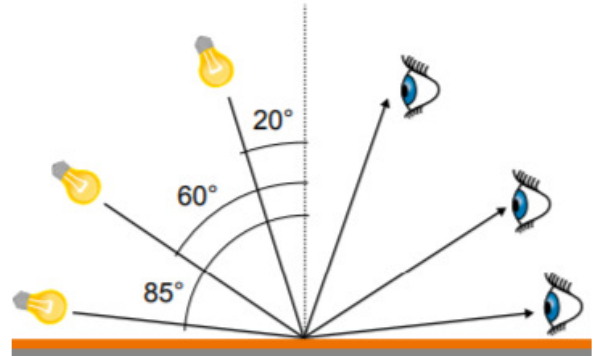

High Gloss



Semi & Matt Gloss

Choosing the correct angle for gloss measurement

Gloss measurement is based on the amount of light reflected on the surface relative to a polished glass reference standard, measured in Gloss Units (GU). The amount of light that is reflected on the surface is dependent on the angle of incidence and the properties of the surface.

Gloss is categorised as either matt, semi or high gloss. In order to determine the most appropriate measurement angle start with a glossmeter set at a 60° angle of incidence.

If the result is between 10 - 70GU, the coating is termed 'semi-gloss' and should be measured using the 60° angle. If the result is less than 10GU, the product is 'low gloss' and should be measured using the 85° angle and if it is greater than 70GU, the product is known as 'high gloss' and should be measured using the 20° angle.

All three angles should be recorded (20, 60 & 85°) when measuring gloss on anodised metals to ensure a complete understanding of the specular reflectance between the coating and the metal substrate.

Gloss Range	60° value	Measure with
High Gloss	>70GU	20°
Semi Gloss	10 - 70GU	60°
Low/ Matt	< 10GU	85°

% Reflectance (%)

% Reflectance compares the amount of light energy transmitted and received by a glossmeter and expresses the value as a percentage. The shinier a surface is, the closer the value will be to 100%.

Whilst the Gloss Unit (GU) scale is linear, each angle of incidence has a different measurement range; 0 – 2000GU (20°), 0 – 1000GU (60°), 0 – 160GU (85°).

% Reflectance displays the measurement value as a percentage relative to the selected angle of incidence. For example, a value of 1000GU at 20° would be expressed as 50%20 and 500GU would be expressed as 25%20, but at 60° this would be expressed as 50%60.

Haze (HU)

Haze causes a drop in reflected contrast and causes 'halos' to appear around the reflected light sources, dramatically reducing the visual quality.

In accordance with ASTM D4039 haze is defined as the numeric difference between the specular reflectance at 60° and 20°.

This is expressed in Haze Units (HU).

